


CAT6A SF/UTP ETHERNET + DIGITAL AUDIO + POWER HYBRID CABLE

CVS LK2CAT6SF 12/3 AD2

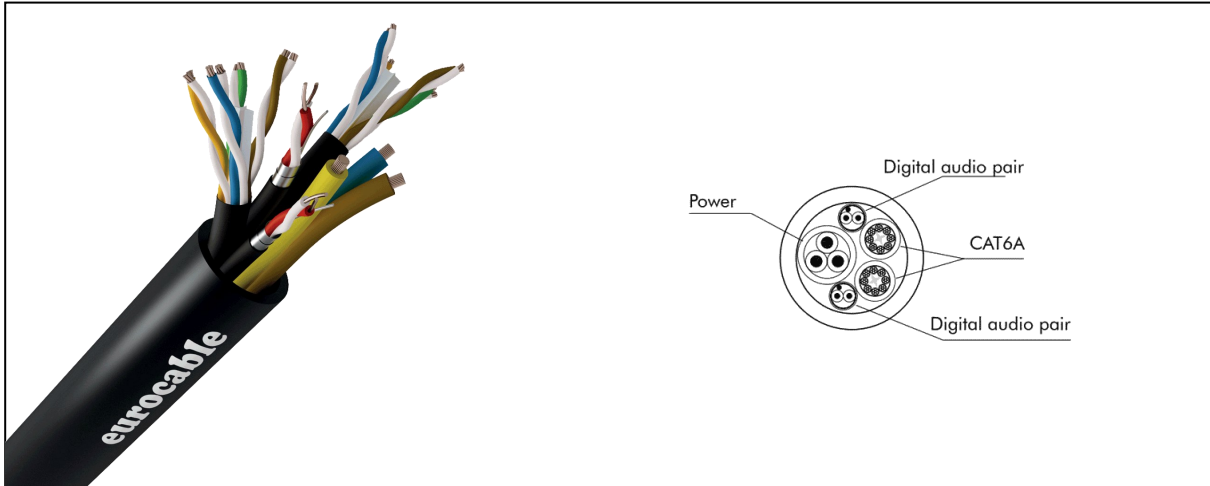

CVS LK2CAT6SF 12/3 AD2				
GENERAL DATA				
Cable	O.D.	21.30 mm		
	Weight	Kg/100m	46,90	
	Operating temperature		-20°C/+70°C	
	Volt. Rate (Power)		600 V	
Jacket	Nominal Thickness		1.70 mm	
	Color		Black	
	Material		PVC	
		<b>Audio</b>	<b>CAT6A</b>	<b>Power</b>
Cable	O.D.	4.00 mm	8.00 mm	10.60 mm
Jacket	Material			
	Nominal Thickness		0.65 mm	0.53 mm
Shield	Material		Aluminium - Polyester tape plus 18 x 0.10 mm drain wire	Aluminium - Polyester tape plus drain wire
	Coverage		100%	100%
Conductor	Qty	2 (CVS LK2CAT6SF 12/3 AD2) 1 (CVS LK1CAT6SF 12/3 AD1)	2 (CVS LK2CAT6SF 12/3 AD2) 1 (CVS LK1CAT6SF 12/3 AD1)	3
	Strand	18 x 0.10 mm	1 x 0.58 mm	70 x 0.25 mm
	Area/AWG	0.14 mm <sup>2</sup> /26	0.22 mm <sup>2</sup> /24	3.44 mm <sup>2</sup> /12
	Insulation O.D.	1.20 mm	1.00 mm	1.00 mm
Material		Annealed tinner copper polyolefine insulated	Solid bare copper polyolefine insulated	Annealed bare copper PVC insulated