


MULTICORE CAT6A F/UTP ETHERNET + RG6 COAXIAL VIDEO CABLE

CVS 3CAT6SF 4RG3

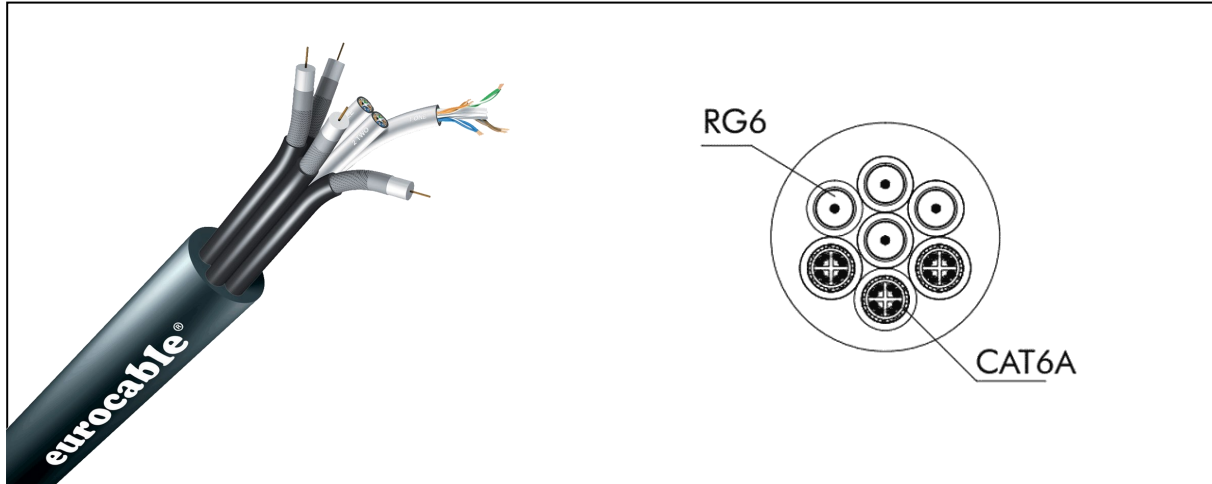

CVS LK3CAT6SF 4RG6*			
		Coax	CAT6A
ELECTRICAL DATA			
D.C.R. at 20°C	Inner conductor	22.5 Ohm/Km	-
	Outer conductor	8.3 Ohm/Km	-
Nominal impedance		75 Ohm	100 Ohm
Vel. of Prop.		84%	67%
GENERAL DATA			
Cable	O.D.	28.6 mm	
	Weight	Kg/100m	88.10
Jacket	Material	Flame retardant PVC	
	Nominal Thickness	2.6 mm	
Shield	Material	I aluminium/polyester/aluminium foil	I aluminium polyester tape
		II tinned copper braid	II annealed tinned copper braid
	Coverage	I 100% - II 96%	I 100% - II 80%
Conductor	Quantity	4	3 x 4 x 2
	Strand	1 mm	1 x 0.57 mm
	Area/AWG	0.785 mm ² /18	0.25 mm ² /23
	Insulation O.D.	4.60 mm	1.10 mm
	Jacket O.D.	6.95 mm	8 mm
	Material	Red copper polyethylene insulated PVC jacket	Bare copper wire polyethylene insulated, external jacket flame retardant LSZH thermoplastic material

*on request