


AD*P1 Digital Audio Pair and 3x1.5 mm Power Cable Neutrik PowerCON and XLR Black/Gold

CVS LKAD*P1

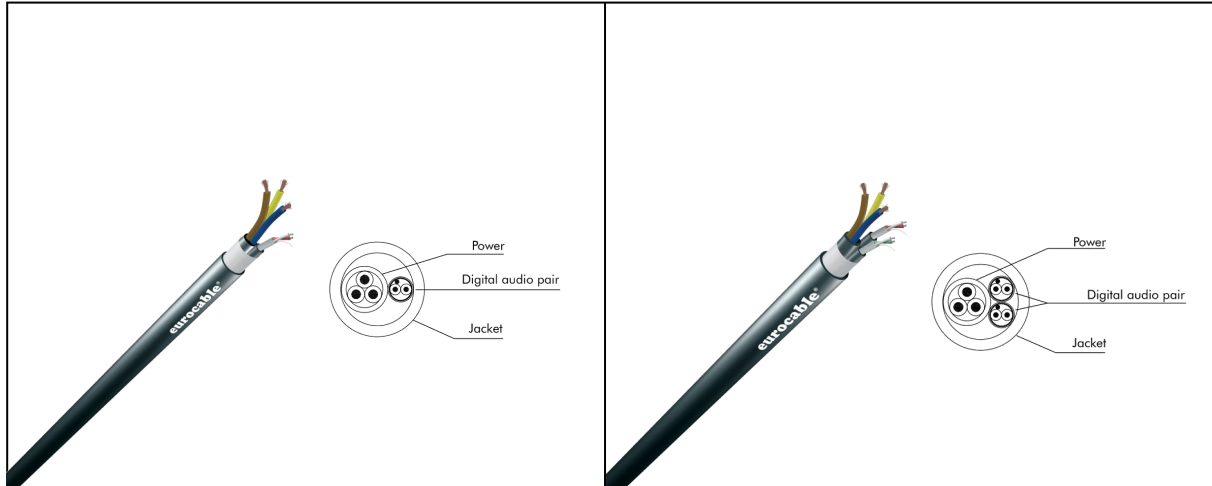

CVS LKAD*P1		AD1P1	AD2P1
ELECTRICAL DATA			
D.C.R. at 20°C	Conductor	75 ohm/km	
	Shield	25 ohm/km	
Capacitance	Conductor/Conductor 1 KHz	80 pF/m	
	Conductor/Shield 1 KHz	160 pF/m	
Nominal Impedance		110 ohm	
Attenuation [db/100m]		5 at 3 MHz/8.5 at 6 MHz/11.5 at 8 MHz	
Vel. of Prop.		80%	
GENERAL DATA			
Cable	O.D.	14.90 mm	
	Standard reels	200 m	
	Weight Kg/100m	20.70	22.40
	Operating temperature	-20°C/+70°C	
Jacket	Material	PVC TM2	
	Nominal Thickness	1.50 mm	
Shield	Material	Audio: Tinned copper spiral shield	
	Coverage	100%	
Conductor	Quantity	Audio: 1 - Power: 1	Audio: 2 - Power: 1
	Strand	Audio: 28 x 0.10 mm - Power: 48 x 0.20 mm	
	Area/AWG	Audio: 0.22mm ² /24 - Power: 3 x 1.5mm ² /3 x 15	
	Insulation O.D.	Audio: 3.75mm - Power: 7.70mm	
	Material	Audio: Annealed bare copper, polyolefine insulated, external jacket: PVC Power: Annealed tinned bare copper, PVC insulated, external jacket: PVC	