


AES/DMX DIGITAL CABLE 24 AWG

CVS LKD2P6DS

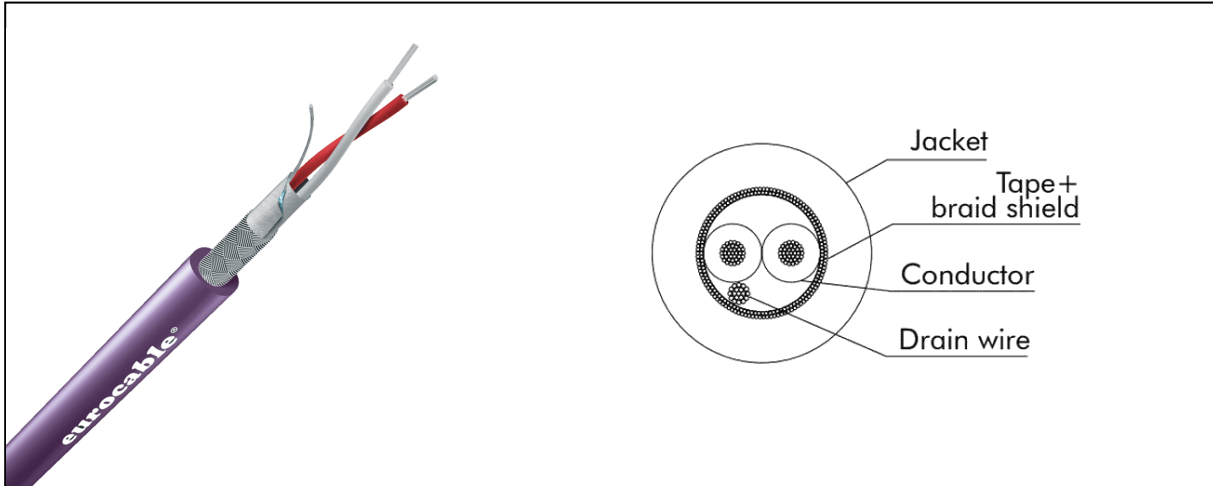

CVS LKD2P6DS*		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	≤ 94.2 ohm/km
	Shield	20 ohm/km
Capacitance	Conductor/Conductor 1 KHz	70 pF/m
	Conductor/ Shield 1 KHz	85 pF/m
Nominal Impedance 3-8 MHz		110 ohm/100m
Attenuation 3-8 MHz		3.70 - 5.90 db/100 m
Vel. of Prop.		80%
GENERAL DATA		
Cable	O.D.	6.00 m
	Standard reels	305 m
	Weight Kg/100m	5.00
	Operating temperature	-30°C/+60°C
Jacket	Material	PVC
	Nominal Thickness	1.00 mm
Shield	Material	Aluminium / polyester tape Tinned copper braid plus drain wire
	Coverage	First: 100% - Second: >80%
	Qty	2
Conductor	Strand	7 x 0.203 mm
	Area/AWG	0.20 mm ² /24
	Insul. O.D.	1.6 mm
	Material	Bare copper foamed polyethylene insulated

*on request