


# AES/DMX Digital Wiring Cables

## CVS LKD4.5-BK

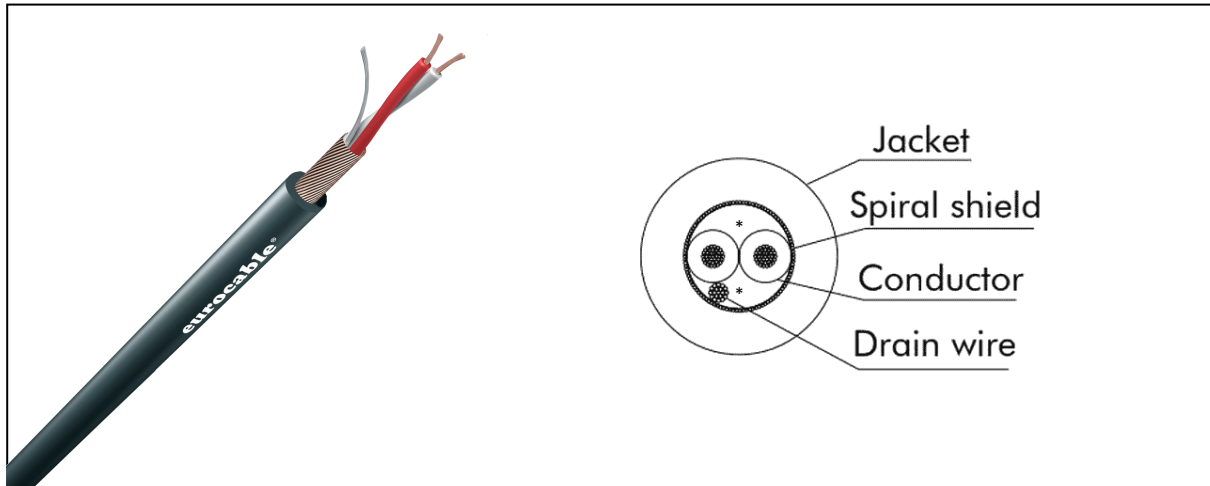

CVS LKD4.5-BK		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	≤ 130 ohm/km
	Shield	≤ 26.0 ohm/km
Capacitance	Conductor/Conductor 1 KHz	(40 ± 5) pF/m
	Conductor/Shield 1 KHz	(80 ± 5) pF/m
Nominal Impedance 3-8 MHz		110 ohm/100m
GENERAL DATA		
Cable	O.D.	4.50 ± 0.2 mm
	Standard reels	100 m
	Weight Kg/100m	2.60
	Operating temperature	-20°C/+65°C
Jacket	Material	PVC
	Nominal Thickness	0.60 mm
Shield	Material	Spiraled electrolytic bare copper screen
	Coverage	≥75%
Conductor	Qty	2
	Strand	18 x 0.100 mm
	Area/AWG	0.14 mm <sup>2</sup>
	Insul. O.D.	≥ 0.50 mm
	Material	Electrolytic bare copper flexible conductor