


WIRING CABLE COPPER SHIELD 03.7 MM

CVS LK02N3R

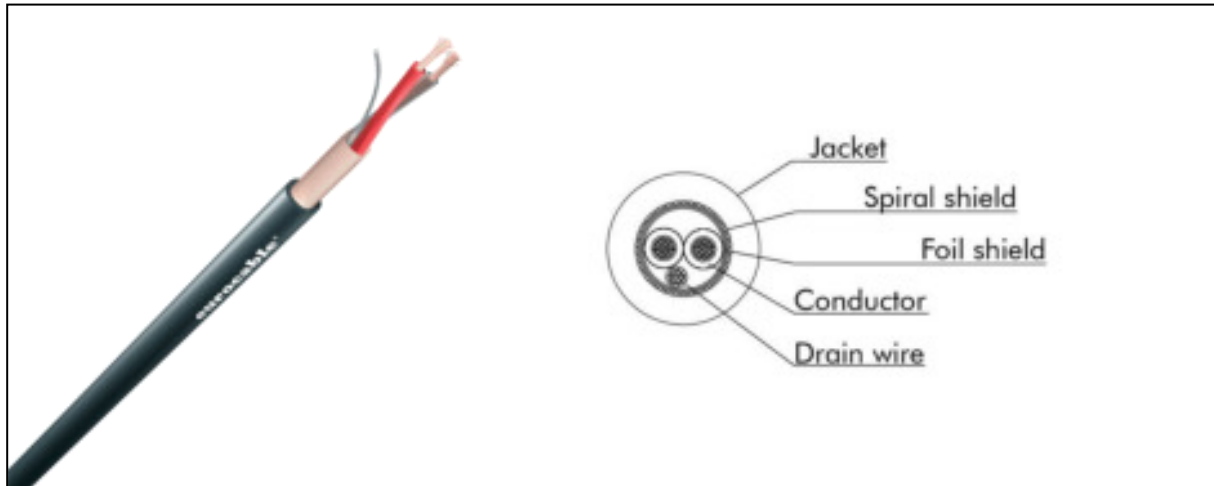

CVS LK02N3R		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	75 ohm/km
	Shield	25 ohm/km
Capacitance	Conductor/Conductor 1 KHz	85 pF/m
	Conductor/Shield 1 KHz	160 pF/m
Nominal Impedance 1 KHz		600 ohm/100m
Attenuation 1 KHz		0.50 db/100m
Inductance		<58 μH/100m
GENERAL DATA		
Cable	O.D.	3.70 mm
	Standard reels	200 m
	Weight Kg/100m	2.20
	Operating temperature	-35°C/+65°C
Jacket	Material	PVC
	Nominal Thickness	0.65 mm
Shield	Material	Bare copper spiral shield
	Coverage	95%
Conductor	Qty	2
	Strand	30 x 0.10 mm
	Area/AWG	0.22 mm ² /24
	Insul. O.D.	1.10 mm
	Material	Bare copper polyethylene insulated