


CAT6A UTP SOLID BARE ETHERNET CABLE

CVS LK CAT6A UTP

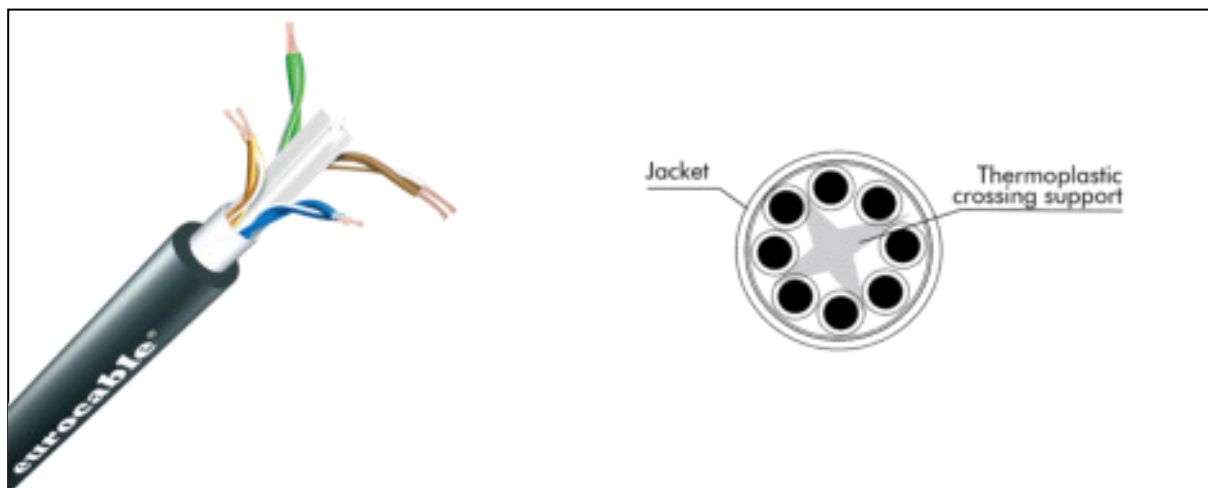

CVS LKCAT6A UTP			
GENERAL DATA			
Cable	O.D.	8.50 mm (± 0.2 mm)	
	Standard reels	305 m	
	Weight	Kg/100m	10.4
	Operating temperature		-20°C/+70°C
Jacket	Material	External: PVC, Internal: LSZH polymer	
Conductor	Quantity	4 x 2	
	Strand	1 x 0.57 mm	
	Area/AWG	0.26 mm ² /23	
	Material	Solid Bare - Red copper	

TRANSMISSION SPECIFICATIONS (for CAT6A)							
Frequence [MHz]	31.2	62.5	100	155.5	250	300	500
Attenuation (max)	9.6	13.7	17.4	21.9	28.1	30.8	40
NEXT (min)	65	60	60	55	50	45	42
ACR (min)	55.4	46.3	42.6	33.1	21.9	14.2	2
Return Loss (min)	25	25	25	25	20	20	15