


POWERED-DMX CABLE - UV PROOF - PUR JACKET

CVS LKDMXCC PUR-UV ML43

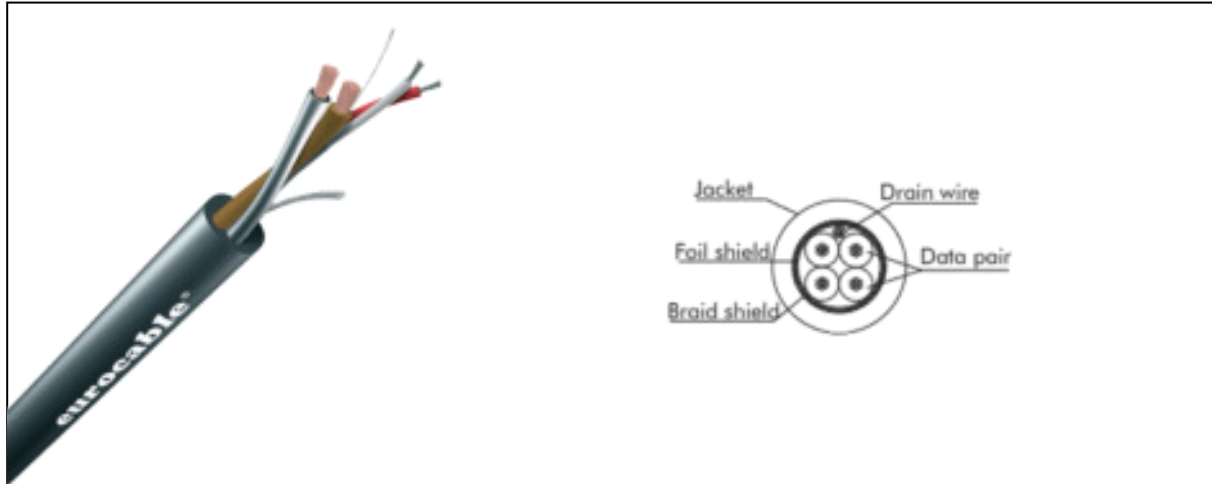

CVS LKDMXCC PUR-UV ML43		
ELECTRICAL DATA		
Description		DMX 512 w/color change power supply
D.C.R.	Conductor	Data: 150 ohm/km - Power: 8.96 ohm/Km
Capacitance 1 KHz	Conductor/Conductor	30 pF/m
	Conductor/Shield	70 pF/m
Nominal Impedance		110 ohm
Attenuation	1 KHz	2 db/100 m
Vel. of Prop.		80%
Inductance		60 μH/100 m
GENERAL DATA		
Cable	O.D.	7.50 mm
	Standard reels	500 m
	Operating temperature	-40°C/+80°C
Jacket	Material	TPU UV Proof
	Nominal Thickness	0.70 mm
Shield	Material	Aluminium - Mylar foil
	Coverage	100%
Conductor	Quantity	2 Data conductors + 2 Power conductors
	Strand	Data: 19 x 0.10 mm - Power: 43 x 0.254 mm
	Area/AWG	Data: 0.15 mm ² /26 - Power: 2 mm ² /14
	Insulation O.D.	Data: 1.6 mm - Power: 2.7 mm
	Material	Tinned copper