


# DOUBLE PAIR DMX CABLE

## CVS LKDMX D

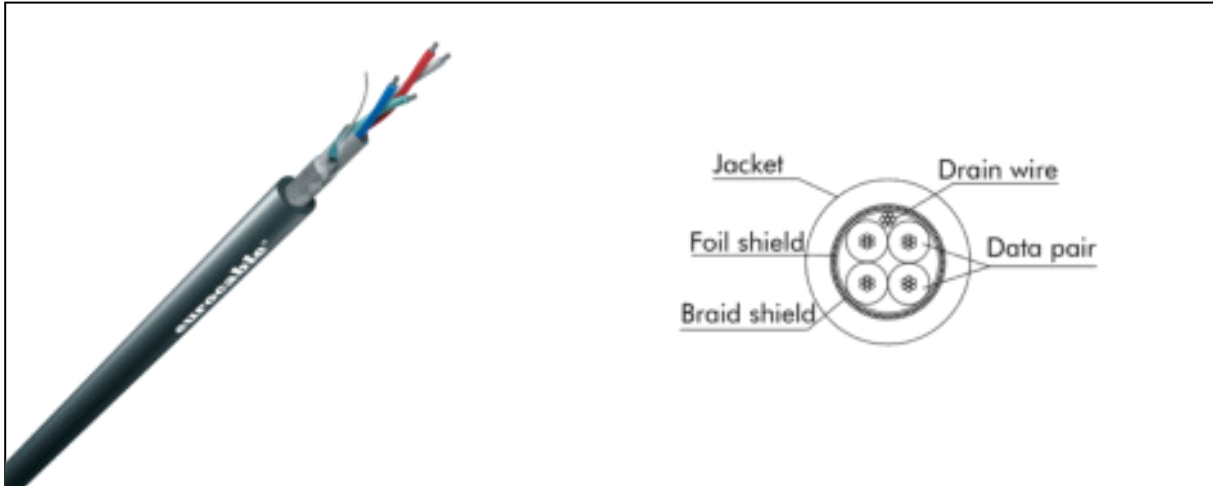

CVS LKDMX D		
ELECTRICAL DATA		
Description		Double pair for DMX 512
D.C.R.	Conductor	65 ohm/km
	Shield	14 ohm/km
Capacitance 1 KHz	Cond/Cond	45 pF/m
	Cond/Shield	90 pF/m
Nominal Impedance		110 ohm
Attenuation	256 KHz	2 db/100 m
Vel. of Prop.		78%
Inductance		55 µH/100 m
GENERAL DATA		
Cable	O.D.	5.50 mm
	Standard reels	200 m
	Weight Kg/100m	7.50
	Op. temp.	-20° C/+70° C
Jacket	Material	PVC flame resistant
	Nom.I Thick.	1.75 mm
Shield	Material	First: Aluminium - Mylar foil Second: Tinned copper braid
	Coverage	First: 100% - Second: 75%
Conductor	Quantity	2 + 2
	Strand	7 x 0.20 mm
	Area/AWG	0.22 mm <sup>2</sup> /24
	Ins. O.D.	1.60 mm
	Material	Annealed tinned copper foamed polyethylene insulated