


CAT6A U/UTP ETHERNET CABLE

CVS LKLANCAT6A U/UTP

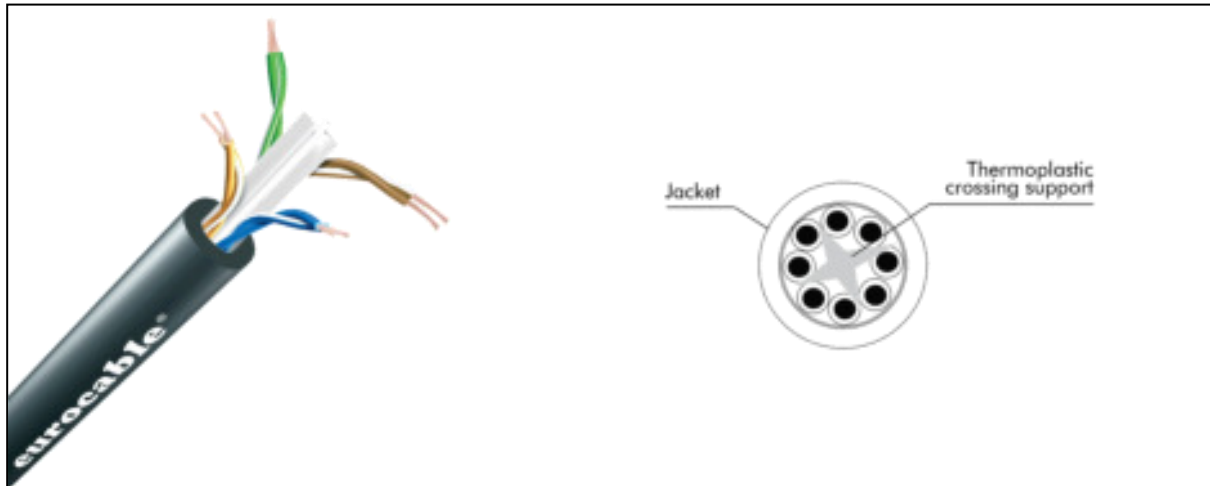

CVS LKLANCAT6A U/UTP											
TRANSMISSION SPECIFICATIONS											
Frequency [MHz]	1	10	20	31.2	62.5	100	155.5	200	250	300	500
Attenuation (max)	1.8	5.4	7.7	9.6	13.7	17.4	21.9	25	28.1	30.8	40
NEXT (min)	100	80	70	65	60	60	55	55	50	45	42
ACR (min)	98.2	74.6	62.3	55.4	46.3	42.6	33.1	30	21.9	14.2	2
Return Loss (min)	25	25	25	25	25	25	25	20	20	20	15
GENERAL DATA											
Cable	O.D.		6.6 mm								
	Standard reels		500 m								
	Operating temperature		-20° C/+60° C								
	Weight	Kg/100m	4.64								
Jacket	Material		LSZH engineering resin + PVC								
	Nominal Thickness		1 mm								
Conductor	Quantity		4 x 2								
	Strand		1 x 0.57								
	Area/AWG		0.26 mm ² /23								
	Material		Solid Bare - Red copper								