


MULTIPAIR AES/EBU DIGITAL AUDIO CABLE ALUMINIUM SHIELD

CVS LKSSAD**P

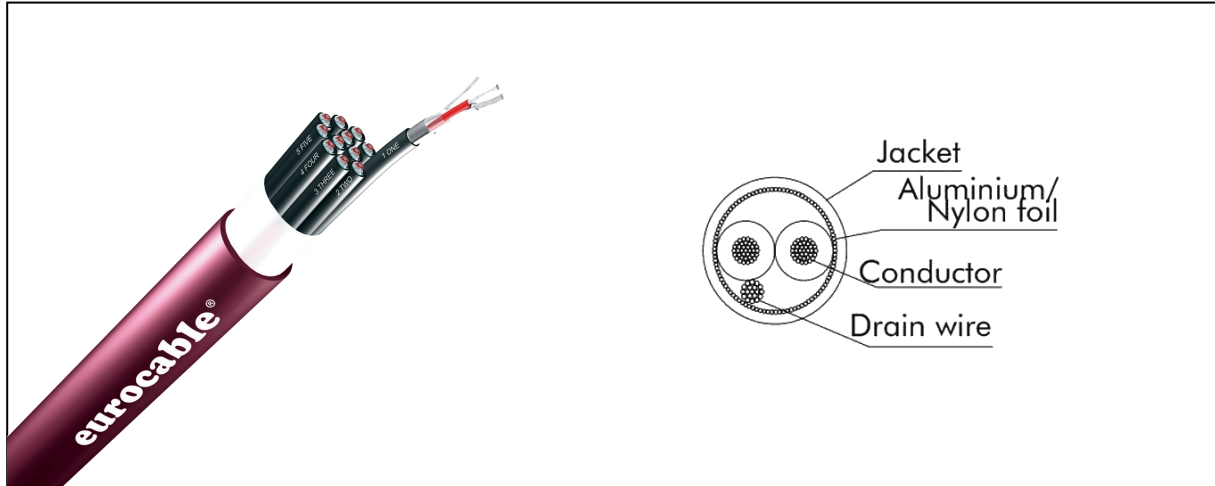

CVS LKSSADCode		04P*	08P*	12P*
ELECTRICAL DATA				
D.C.R. at 20°C	Conductor	< 95 ohm/km		
	Shield	< 40 ohm/km		
Capacitance	Conductor/Conductor 1 KHz	50 pF/m		
	Conductor/ Shield 1 KHz	100 pF/m		
Nominal Impedance 3 - 8 MHz		110 ohm/100 m		
Attenuation 3 - 8 MHz		7 - 10 db/100 m		
Vel. of Prop.		80%		
GENERAL DATA				
Pairs cable		4	8	12
Cable	O.D.	11.50 mm	14.60 mm	17.60 mm
	Standard reels	305 m/1000 ft		
	Weight Kg/100m	12.00	18.00	25.00
	Operating temperature	-20°C/+70°C		
Jacket	Material	PVC		
	Nominal Thickness	1.30 mm		
Shield	Material	Aluminium - polyester tape plus tinned copper drain wire (7 x 0.20 mm)		
	Coverage	100%		
Conductor	Qty	4 x 2	8 x 2	12 x 2
	Strand	7 x 0.20 mm		
	Area/AWG	0.20 mm ² /24		
	Insul. O.D.	1.45 mm		
	Material	Annealed tinned copper cellular polyolefine insulated		

*on request