


MULTIPAIR AUDIO CABLES ALUMINIUM SHIEL + COPPER OVERALL SHIELD

CVS LKSSAS32C

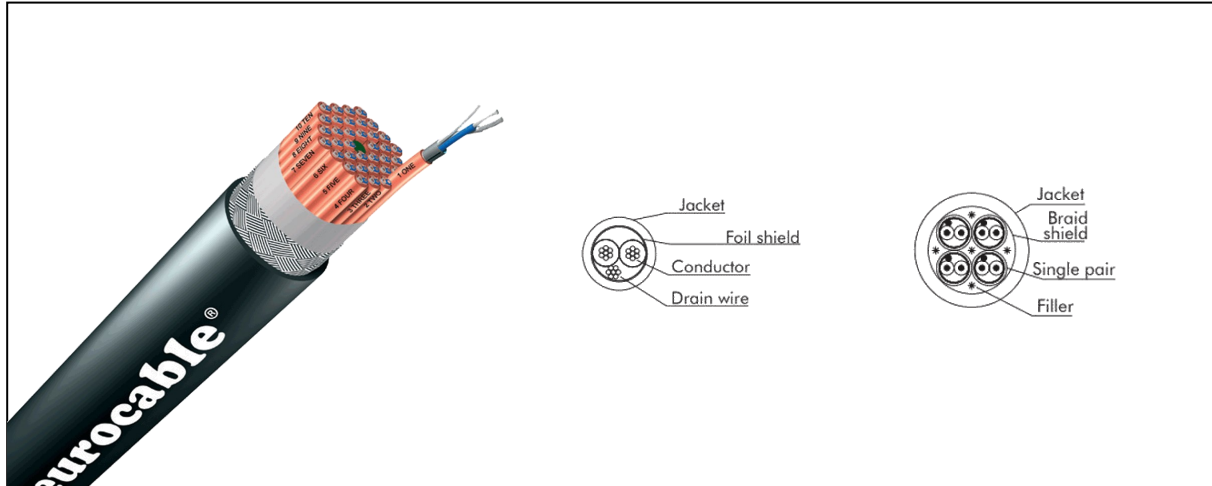

CVS LKSSASCode		02C*	04C*	08C*	12C*	16C*	24C*	28C*	32C*	36C*	48C*	
ELECTRICAL DATA												
D.C.R. at 20° C	Conductor	< 90 ohm/km										
	Shield	< 40 ohm/km										
Capacitance	Conductor/Conductor 1 KHz	140 pF/m										
	Conductor/Shield 1 KHz	250 pF/m										
Nominal Impedance 1 KHz		440 ohm/100 m										
Attenuation 1 KHz		0.24 db/100 m										
Inductance		80 µH/100 m										
GENERAL DATA												
Pairs cable		2	4	8	12	16	24	28	32	36	48	
Cable	O.D.	8.30 mm	10.10 mm	13.00 mm	15.50 mm	18.10 mm	21.10 mm	22.40 mm	22.60 mm	23.90 mm	28.20 mm	
	Standard reels	500 m					200 m					
	Weight Kg/100m	9,30	13,40	22,60	30,40	43,20	58,10	67,50	72,20	84,50	100,60	
	Operating temperature	-20°C/+70°C										
Jacket	Material	PVC										
	Nominal Thickness	1.20 mm	1.40 mm	1.55 mm	1.60 mm	2.00 mm				2.20 mm		
Shield	Material	Annealed tinned copper braid										
	Coverage	80%										
Conductor	Qty	2 x 2	4 x 2	8 x 2	12 x 2	16 x 2	24 x 2	28 x 2	32 x 2	36 x 2	48 x 2	
	Strand	7 x 0.20 mm										
	Area/AWG	0.22 mm ² /24										
	O.D.	2.80 mm										
	Material	Annealed tinned copper braid PVC insulated										

*on request