


# Multicore CAT6A Cable

## CVS LK\*CAT6AUF

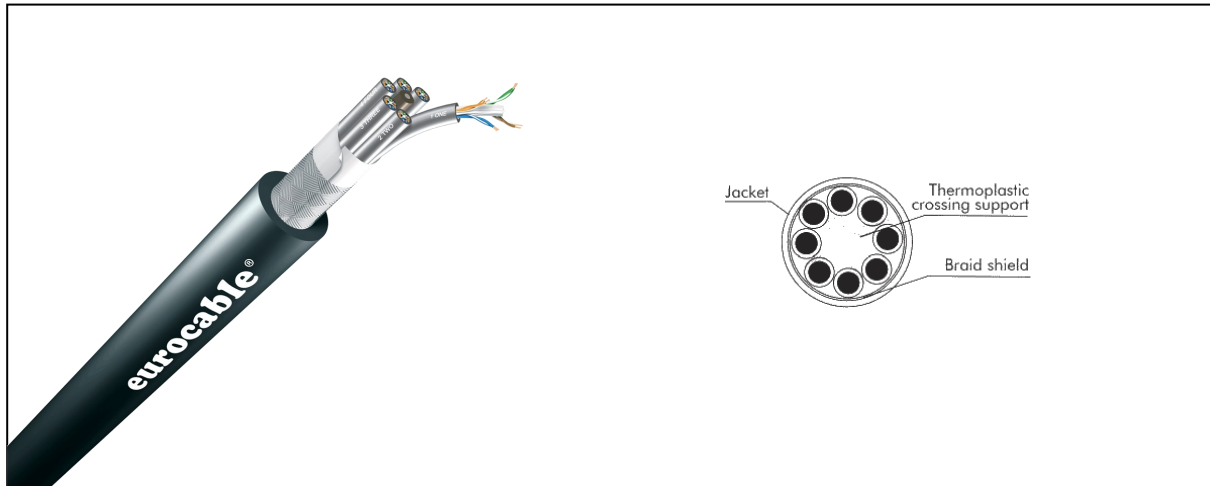

		CVS LK4CAT6AUF					CVS LK6CAT6AUF					
<b>TRANSMISSION SPECIFICATIONS</b>												
Frequency [MHz]		1	10	20	31,2	62,5	100	155,5	200	250	300	500
Attenuation (max)		1,8	5,4	7,7	9,6	13,7	17,4	21,9	25	28,1	30,8	40
NEXT (min)		100	80	70	65	60	60	55	55	50	45	42
ACR (min)		98,2	74,6	62,3	55,4	46,3	42,6	33,1	30	21,9	14,2	2
Return Loss (min)		25	25	25	25	25	25	25	20	20	20	15
<b>GENERAL DATA</b>												
Cable	O.D.	22.10 mm					27.50 mm					
	Standard reels	200 m										
	Weight	Kg/100m	49,40					73,30				
	Operating temperature	-20°C/+70°C										
Jacket	Material	PVC										
Shield	Material	Tinned copper braid										
	Coverage	80%										
Conductor	Quantity	4 x 4 x 2					6 x 4 x 2					
	Strand	1 x 0.57 mm										
	Area/AWG	0.26 mm <sup>2</sup> /23										
	Material	Solid bare red copper polyethylene insulated										